


HAST Products

HIRAYAMA

Saturated Type "PCT" Chamber (Pressure Cooker)

Features:

- Cycle progress lamps (power, heating, test, exhaust)
- Digital temp. controller / P.I.D. control
- Integrated hour meter
- Alarm lamp/buzzer switch
- Fine exhaust valve
- Pressure gauge
- Safety cover (with Solenoid locking)
- Casters
- Power cord (1 pce)
- Drain hose (1 pce)
- Eye nut tightening bar (1 pce)

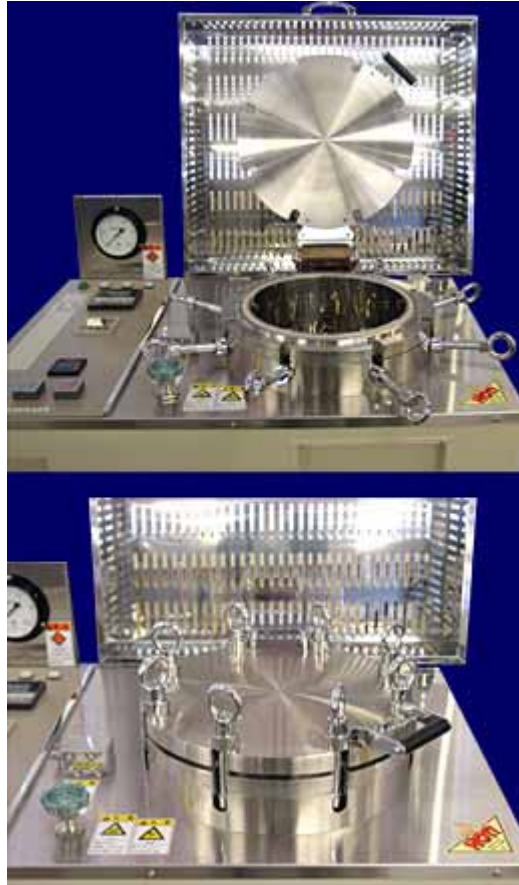

[Click here to convert specifications to US](#)

Model	PC-3011 III
Outer Dimensions	900W x 1150H x 600D mm
Chamber Size	280 ø x 315D mm
Effective Chamber Size	250 ø x 200D mm
Test Temp. Range	105.0 ~ 180.0 °C
Max. Usable Pressure	0.902 Mpa
Test Timer	Digital Timer 999.9h
Chamber Material	Stainless Steel (SUS316L)
Withstand Load	30 kg
No-Water Heating Prevention Device	200 °C
Overpressure Prevention Device	0.981 Mpa
Safety Valve	1.059 Mpa
Leakage Breaker	30 A Sensed Current 30 mA

Fuse (for control)	5 A
Thermal Fuse	75 °C 6 A
Breaker for Sheathed Heater	30 A
Power Source	AC220V 1 ø 5 kW 60 Hz
Net Weight	Approx. 110 kg